

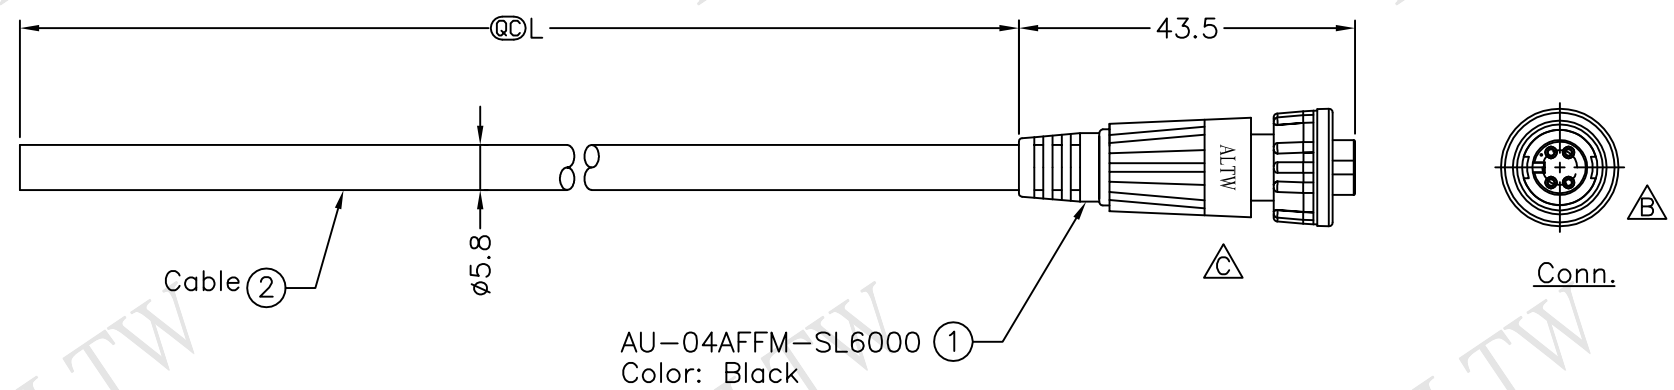



| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|----------------|------------|----------|---------------------|
| B | LEN-0C0258~261 | 2010/11/25 | Ivan Lin | Change View & Frame |
| C | LE315C0367~370 | 2015/12/08 | Ruru | Change Logo |



AU-04AFFM-SL6000
Color: Black



Pin Assignments
Front View 前視圖

| | | |
|------------|---|-------|
| Yellow | 黃 | 4 |
| Red | 紅 | 3 |
| Green | 綠 | 2 |
| White | 白 | 1 |
| Wire Color | | Conn. |
| Out Pin | | |

Note:

- * @Important Dimension.
- * Connector: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Screw Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Cable: UL2464 24AWG*4C+D+AL/My
UV Resistant, OD=5.8mm, Black
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

| | | | | | | | |
|--------------|------|-------|---------------------------------------|--------------------|------------------|-------------|------------|
| UNIT:mm | | TITLE | 4Pin Female Connector Female Pin(2A) | | ITEM NO | DRAWN BY | DATE |
| TOLERANCE | ±0.5 | SCALE | Free | SHEET 1 OF 1 | DWG NO | CHECKED BY | DATE |
| | | REV. | C | SIZE A4 | CUSTOMER | APPROVED BY | DATE |
| | | | | @ :Inspection Item | ALTW | Lisa | 2015/12/08 |
| Amphenol LTW | | | 安費諾亮泰企業股份有限公司 | | | Ruru | 2015/12/08 |
| | | | | | AU-04AFFM-SL6AXX | Rita | 2015/12/08 |
| | | | | | | | 2015/12/08 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.