



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0348~351	2010/11/26	Ivan Lin	Change View & Frame
C	LEN15B0157~160	2015/11/06	Vicky	Update Logo

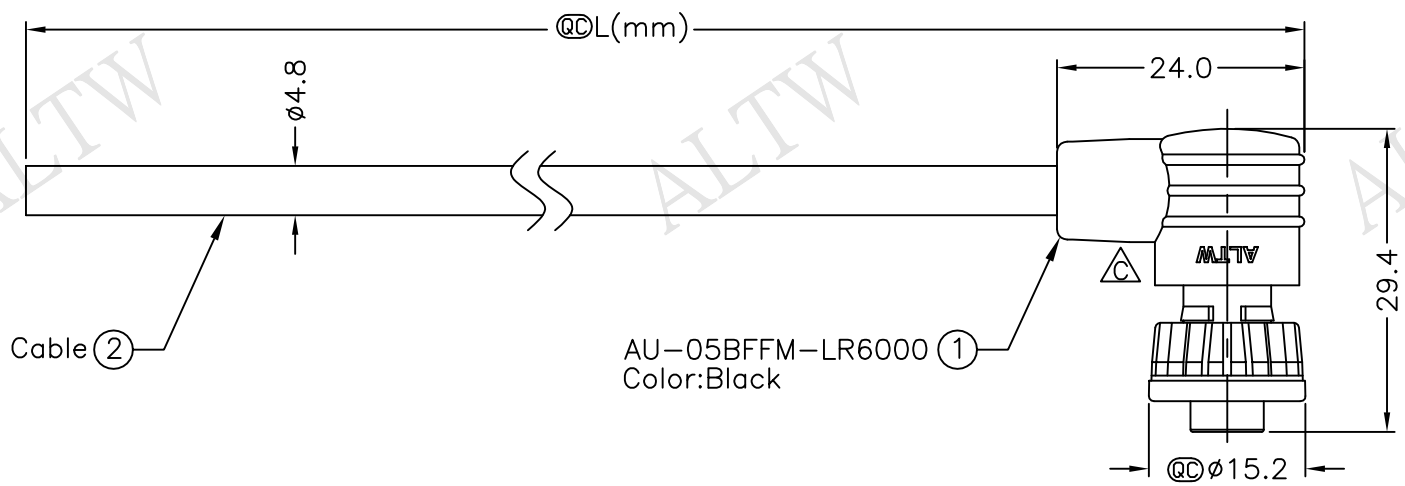

AU-05BFFM-LR6000 (1)
Color:Black



AU-05BFFM-LR6AXX
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

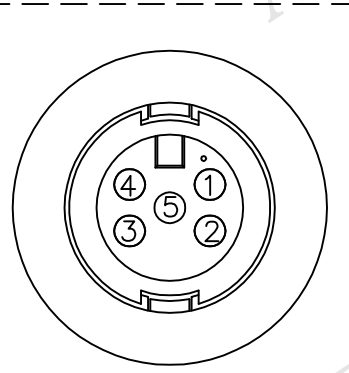

Pin Assignments
Front View

5	Yellow	黃
4	White	白
3	Red	紅
2	Brown	棕
1	Green	綠
Conn.	Wire Color	
Pin Out		



Note: Conn.

- * @Q Important Dimensions To Check.
- * Waterproof Rate: IP66
- * Housing:Nylon+GF ,Black
- * Female Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 26AWG*5C+Drain+Al/My. PVC Jacket. UV Resistant. OD=4.8mm, Black
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm	
TOLERANCE	
±0.5 mm	

TITLE		
Mini, Cable Lock 5Pin F Conn F Pin		
SCALE	Free	SHEET 1 OF 1
REV. C	SIZE A4	@Q :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	AU-05BFFM-LR6AXX
CUSTOMER	ALTW

DRAWN BY	Vicky
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2015/11/06
DATE	2015/11/06
DATE	2015/11/06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1 2 3 4 5 6 7 8

F

E

D

C

B

A

1 2 3 4 5 6 7 8

8 FMW0702-01-01A2