





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LF3-7A0044	2007/10/12	Tina	Add "Pin Out"
C	LEN1590415~18	2015/09/10	Ruru	Change Logo & Note

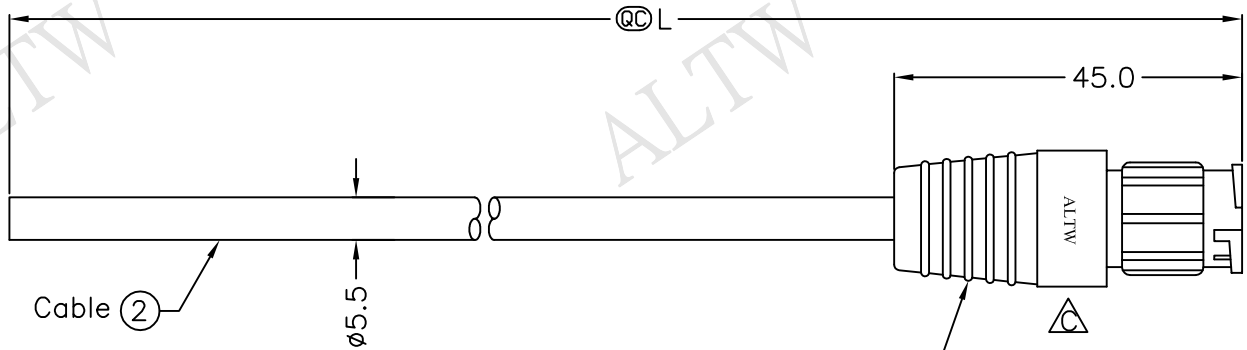

△ BB-04BMMM-LL7000 ①  
Color: Black



BB-04BMMM-LL7AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters  
 Cable Length(L):01~99Meters

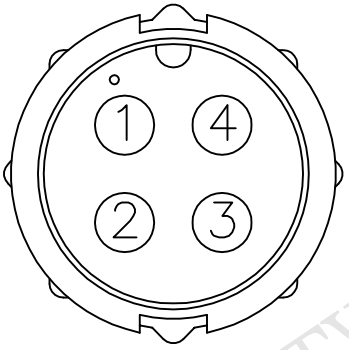

Pin Assignments  
Front View前視圖

White	白	4
Black	黑	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out	△	

Note:

- \* @C Important Dimensions To Check.
- \* Waterproof Rate: IP67
- \* Housing: Nylon+GF, Black
- \* Pin: Copper Alloy, Gold Plated
- \* Cable: UL2464 20AWG\*4C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.5, Black
- \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	△ Standard,Cable Lock 4Pin M Conn. M Pin		
SCALE	Free	SHEET 1	OF 1
REV.	C	SIZE	A4
		@C	:Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BB-04BMMM-LL7AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lion

DATE	2015/09/10
DATE	2015/09/10
DATE	2015/09/10

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.