
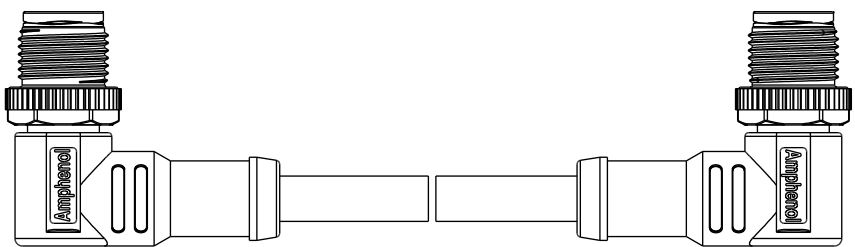
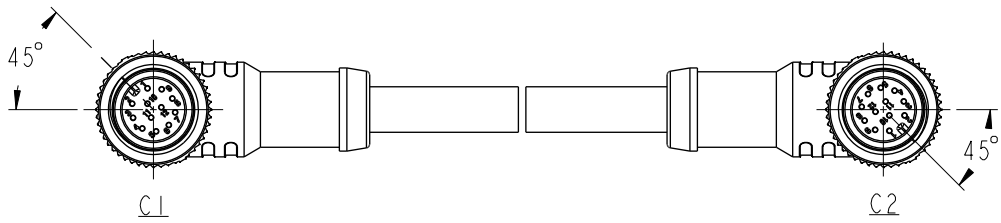
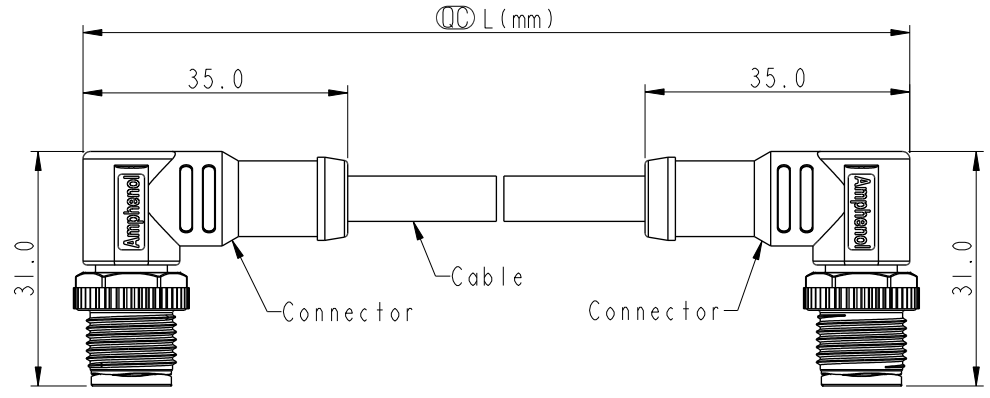


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201808	2020/11/19	Vicky	$\triangle B$ X4
C	C210232	2021/04/06	Vicky	$\triangle C$ X4



Note:

- * RoHS Compliant
- * \textcircled{L} Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Thermoplastic, Black
 - Outer Mold: Thermoplastic, Black
- * Cable: UL20549, PUR Jacket, Black
- * Cable Length Tolerance:



0.5M < L ≤ 1M:	+60/-0 mm
1M < L ≤ 3M:	+120/-0 mm
3M < L ≤ 5M:	+160/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm








UNIT:mm		TITLE	ACC, SEN, A Code, DB-ENDED $\triangle C$
TOLERANCE	± 0.5 mm	SCALE	1:2
		SIZE	A4
		SHEET	1 OF 2
		REV.	C
		WC-REV.	
		\textcircled{L}	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司


ITEM NO	DRAWN BY	DATE
	Vicky	2018-12-07
DWG NO	CHECKED BY	DATE
$\triangle B$ MSAPXXMR-SAPMR-SBXXX	Rita	2018-12-07
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-07

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

 MSAPXXMR-SAPMR-SBXXX XX: No. Of Pin				XXX: 0.5~99Meters A05: 0.5 Meter 1: 01 Meter 2: 02 Meters : 99: 99 Meters																																
							<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">12P</td> <td style="width: 15%;">6.0</td> <td style="width: 15%;">26</td> <td style="width: 55%;">MSAP12MR-SAPMR-SBXXX</td> </tr> <tr> <td>10P</td> <td></td> <td></td> <td>MSAP10MR-SAPMR-SBXXX</td> </tr> <tr> <td>8P</td> <td>4.8</td> <td rowspan="2">24</td> <td>MSAP08MR-SAPMR-SBXXX</td> </tr> <tr> <td>6P</td> <td>5.0</td> <td>MSAP06MR-SAPMR-SBXXX</td> </tr> <tr> <td>5P</td> <td>4.4</td> <td rowspan="3">22</td> <td>MSAP05MR-SAPMR-SBXXX</td> </tr> <tr> <td>4P</td> <td>4.0</td> <td>MSAP04MR-SAPMR-SBXXX</td> </tr> <tr> <td>3P</td> <td>3.8</td> <td>MSAP03MR-SAPMR-SBXXX</td> </tr> <tr> <td>Contacts</td> <td>Cable OD</td> <td>AWG</td> <td>Item No.</td> </tr> </table>	12P	6.0	26	MSAP12MR-SAPMR-SBXXX	10P			MSAP10MR-SAPMR-SBXXX	8P	4.8	24	MSAP08MR-SAPMR-SBXXX	6P	5.0	MSAP06MR-SAPMR-SBXXX	5P	4.4	22	MSAP05MR-SAPMR-SBXXX	4P	4.0	MSAP04MR-SAPMR-SBXXX	3P	3.8	MSAP03MR-SAPMR-SBXXX	Contacts	Cable OD	AWG	Item No.
12P	6.0	26	MSAP12MR-SAPMR-SBXXX																																	
10P			MSAP10MR-SAPMR-SBXXX																																	
8P	4.8	24	MSAP08MR-SAPMR-SBXXX																																	
6P	5.0		MSAP06MR-SAPMR-SBXXX																																	
5P	4.4	22	MSAP05MR-SAPMR-SBXXX																																	
4P	4.0		MSAP04MR-SAPMR-SBXXX																																	
3P	3.8		MSAP03MR-SAPMR-SBXXX																																	
Contacts	Cable OD	AWG	Item No.																																	

	Pin Out	5 -- 4 Black 黑 3 Blue 藍 2 -- 1 Brown 棕	5 -- 4 Black 黑 3 Blue 藍 2 White 白 1 Brown 棕	5 Gray 灰 4 Black 黑 3 Blue 藍 2 White 白 1 Brown 棕	8 -- 7 Blue 藍 6 Pink 粉 5 -- 4 Yellow 黃 3 Green 綠 2 Brown 棕 1 White 白	8 Red 紅 7 Blue 藍 6 Pink 粉 5 Gray 灰 4 Yellow 黃 3 Green 綠 2 Brown 棕 1 White 白	12 -- 11 -- 10 Violet 紫 9 Black 黑 8 Red 紅 7 Blue 藍 6 Pink 粉 5 Gray 灰 4 Yellow 黃 3 Green 綠 2 Brown 棕 1 White 白	12 Red/Blue 紅/藍 11 Gray/Pink 灰/粉 10 Violet 紫 9 Black 黑 8 Red 紅 7 Blue 藍 6 Pink 粉 5 Gray 灰 4 Yellow 黃 3 Green 綠 2 Brown 棕 1 White 白
		Pin # Wire	Pin # Wire	Pin # Wire	Pin # Wire	Pin # Wire	Pin # Wire	Pin # Wire
C1 & C2								
		3P	4P	5P	6P	8P	10P	12P

Pin Assignments Front View

UNIT:mm		TITLE ACC, SEN, A Code, DB-ENDED MM		Amphenol LTW	ITEM NO	DRAWN BY Vicky	DATE 2018-12-07
TOLERANCE ±0.5 mm		SCALE 1:2	SIZE A4	安費諾亮泰企業股份有限公司	DWG NO  MSAPXXMR-SAPMR-SBXXX	CHECKED BY Rita	DATE 2018-12-07
		REV. C	WC-REV.	 : Inspection item	CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-07